


Elektrischer Anschluss / Raccordement électrique / Electrical connection



Ausgangssignal	Output	Load resistance	$I_{\text{SUPPLY}} \leq 10 \text{ mA}$	$U_{\text{SUPPLY}} 5 \text{ VDC} \pm 0.25 \text{ VDC}$
Signal de sortie	0.5 ... 4.5VDC	$\geq 5 \text{ k}\Omega$		ratiometrisch/ratiométrique/ ratiometric
Output				

Umgebungsbedingungen

Betriebstemperatur:	-25...+100°C
Medientemperatur:	-25...+100°C
Lagertemperatur:	-25...+100°C
Schutzart:	min. IP 40

Mechanische Daten

Kontaktstifte:	CuFe2P verzinkt
----------------	-----------------

Conditions d'environnement

Température de service:	-25...+100°C
Température de médias:	-25...+100°C
Température de stockage:	-25...+100°C
Protection:	min. IP 40

Spécifications mécaniques

Contacts mâle:	CuFe2P étamé
----------------	--------------

Environmental conditions

Operating temperature:	-25...+100°C
Media temperature:	-25...+100°C
Storage temperature:	-25...+100°C
Protection:	min. IP 40


Mechanical data

Male contacts:	CuFe2P tin plated
----------------	-------------------

Betriebsdruck / Pression de fonctionnement / Operating pressure

Bereich	0 ... 6	Überdruck	max. 12
Plage	0 ... 10	Surpression	30
Range	0 ... 16	Over pressure	32
[bar]		[bar]	

Elektrischer Anschluss / Raccordement électrique / Electrical connection



Ausgangssignal	Output	Load resistance	$I_{\text{SUPPLY}} \leq 10 \text{ mA}$	$U_{\text{SUPPLY}} 5 \text{ VDC} \pm 0.25 \text{ VDC}$
Signal de sortie	0.5 ... 4.5VDC	$\geq 5 \text{ k}\Omega$		ratiometrisch/ratiométrique/ ratiometric
Output				

Umgebungsbedingungen

Betriebstemperatur:	-25...+100°C
Medientemperatur:	-25...+100°C
Lagertemperatur:	-25...+100°C
Schutzart:	min. IP 40

Mechanische Daten

Kontaktstifte:	CuFe2P verzinkt
----------------	-----------------

Conditions d'environnement

Température de service:	-25...+100°C
Température de médias:	-25...+100°C
Température de stockage:	-25...+100°C
Protection:	min. IP 40

Spécifications mécaniques

Contacts mâle:	CuFe2P étamé
----------------	--------------

Environmental conditions


Operating temperature:	-25...+100°C
Media temperature:	-25...+100°C
Storage temperature:	-25...+100°C
Protection:	min. IP 40

Mechanical data

Male contacts:	CuFe2P tin plated
----------------	-------------------


Betriebsdruck / Pression de fonctionnement / Operating pressure

Bereich	0 ... 6	Überdruck	max. 12
Plage	0 ... 10	Surpression	30
Range	0 ... 16	Over pressure	32
[bar]		[bar]	


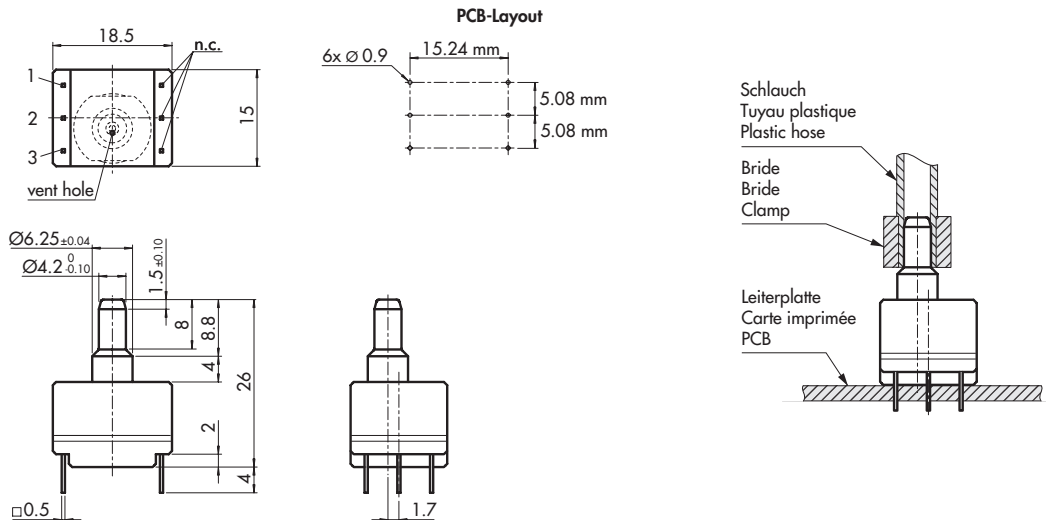


Anschluss von / Connectique de / Connection of

U-OUT 3-wires single arrangement




multiple arrangement

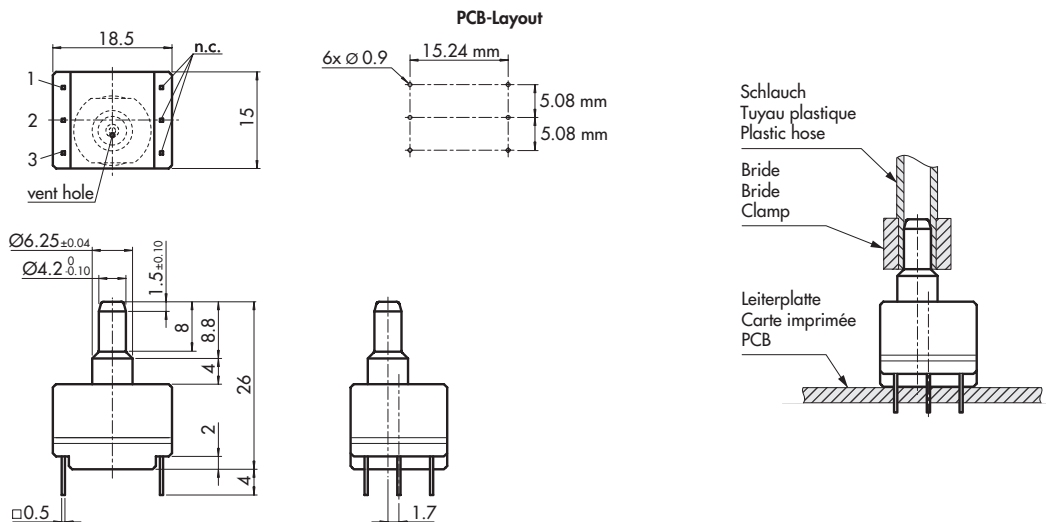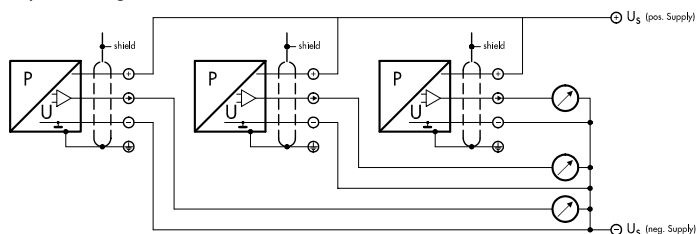

Anschluss von / Connectique de / Connection of

U-OUT 3-wires single arrangement



multiple arrangement

